




**MULTIPLE DIAMETERS**

Available in lengths from 1.0m to 8.0m to suit any application. All insertion tubes feature our patented EasyGlide, 4-layer Tungsten sheathing for smooth entry and exit, and are IP 67 rated for rugged durability.



**INDUSTRY-FIRST MINI-JOYSTICKS**

The VJ-4 user interface is designed to enable maximum functionality with minimal effort. Use the mini-joysticks OR touchscreen to navigate all menus and adjust all settings. No feature-rich borescope is easier or more intuitive to use.



**CUSTOM OPTIONS TO FIT EVERY APPLICATION**

With a variety of diameters and lengths available, along with focal length and illumination options, you can have a borescope perfectly tailored to your specific inspection requirements.




**UNRIVALED SERVICE AND EXPERTISE**

The VJ-4 is brought to you by the same team of borescope experts that changed the industry 15 years ago with the world's first mechanically articulating, joystick-controlled video borescope. Find out why we are the #1 seller of borescopes in the US.


### EASY ORGANIZATION & STORAGE




### INSTANT ACCESS TO KEY FUNCTIONS

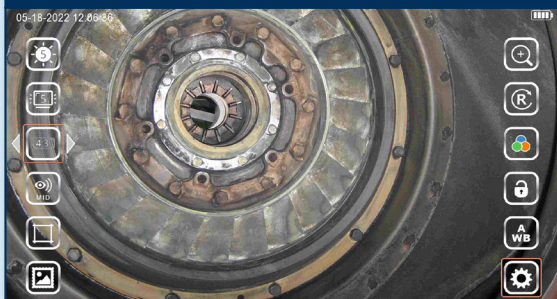


### WIDE RANGE OF SETTINGS

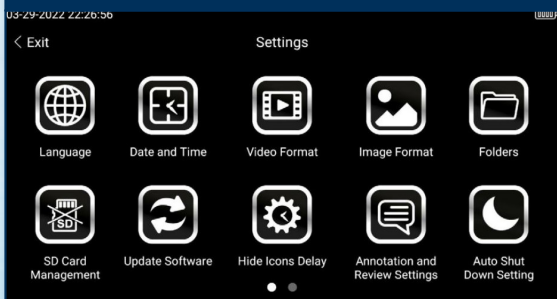

### ON-SCREEN ANNOTATION

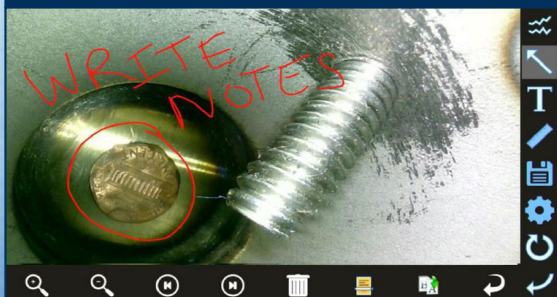


### TOUCH-SCREEN OR STYLUS INTERFACE

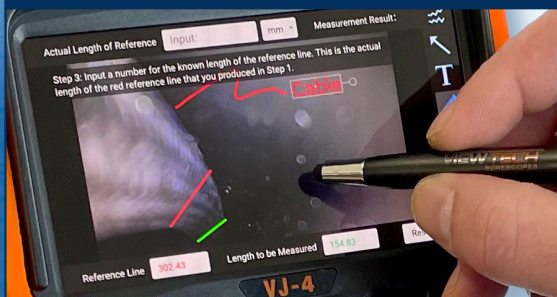

RUGGEDIZED CASE & ACCESSORIES ARE INCLUDED WITH EVERY BORESCOPE WE SELL



### UV AND WHITE LIGHT FLASHLIGHTS

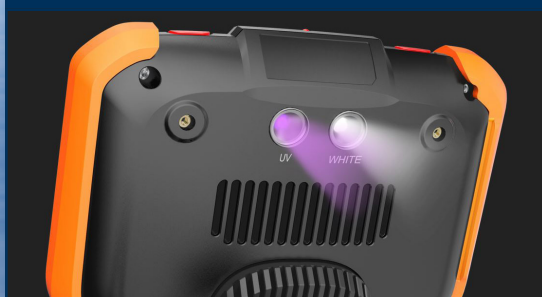

### SELF SPOOLING HOLDER TUBE IN THE CASE



<b>INSERTION TUBE</b>	Outer Diameter	6.0mm	
	Length	1.5m or 3.0m	
	Exterior Material	Tungsten EasyGlide, crush-resistant	
	Chemical Compatibility	Water, machine oil, heating oil, diesel, 3.5% saline concentrate	
	Articulation Range	360° around, 170±10° backward (1.5m) 120±10° backward (3.0m)	
<b>OPTICS</b>	Angle of View	80°	
	Depth of Field	50mm - ∞	
	Effective Pixels	2,073,600 pixels	
	Illumination Method	6 Super high-intensity white LEDs	
	Illumination Output	≤ 70,000lux	
<b>BASE UNIT</b>	Display Monitor	5.5" OLED touch screen	
	Articulation Control	Thumb-actuated, mechanical rocker	
	Joystick Lock	Automatic	
	Brightness Control	10-step LED brightness adjustment	
	Control Buttons	Two multi-function mini joysticks and left/right buttons	
	Playback	Photos, videos (w/wo audio), thumbnail view	
	Audio / Microphone	3.5mm port	
	Internal storage	32 GB SD Card   10,000 photos, 8 hours video	
	Data I/O ports	SD card, HDMI, USB Type C	
	Battery	Two 18650B PCB-Protected Li-ion batteries (rechargeable)	
	Operating Method	One handed, portable	
	Dimensions	13.6" x 6.2" x 7.3"	
	Weight	2.09 lbs. / .95 kg	
	<b>MENU FUNCTIONS &amp; OPTIONS</b>	User Interface	Pop-up menu operation, menu navigation, touchscreen
File Management		Photo and video recording, playback, thumbnail preview, delete	
Image Control		Image freeze, image flip, zoom in/out	
Image Format		BMP, PNG or JPG	
Video Format		AVI or MP4	
Language		English, French, Spanish	
<b>OPERATING LIMITS</b>	Run Time	≤ 3 Hours	
	Operating Temp. Base Unit	-10 - 50°C, -5 - 122°F	
	Operating Temp. Insertion Tube	-20 - 60°C, -4 - 140°F	
	IP Rating, Insertion Tube	IP67	